





New:  
**D22x series**

# THE SMART ENTRY TO YOUR HOME

With DoorBird you will never  
miss a visitor.

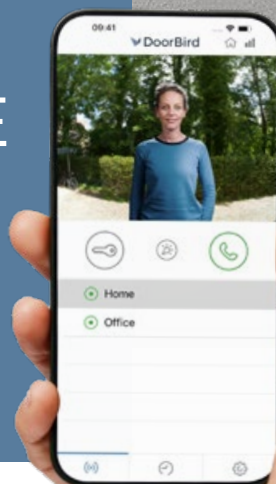

Designed,  
developed and  
made in Germany

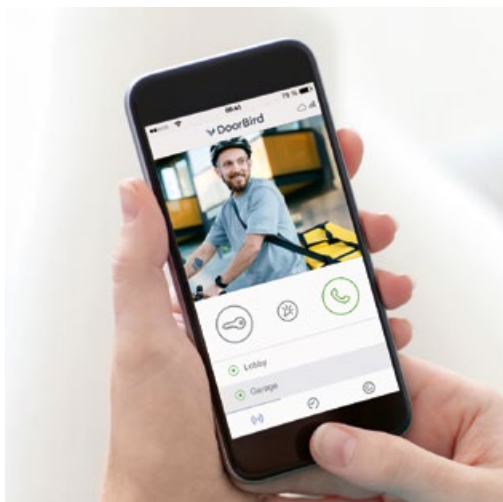

# CONTENT

|                                       |    |
|---------------------------------------|----|
| How does it work?                     | 3  |
| Our IP video intercom systems         | 4  |
| D11x series                           | 6  |
| D22x series                           | 12 |
| D31x series                           | 24 |
| Letterboxes                           | 28 |
| Custom Solutions                      | 30 |
| Finishes and Colors                   | 32 |
| IP Video Indoor Stations              | 34 |
| IP Video Mini Dome Camera A1131       | 38 |
| IP Access Control System              | 40 |
| Optional accessories                  | 41 |
| Smart Door Controller D410            | 41 |
| Gigabit High-PoE Injector A1093       | 41 |
| IP Door Chime A1061W                  | 42 |
| 2-Wire Ethernet PoE+ Converter A1072  | 42 |
| IP Video Door Station D1101UV Upgrade | 42 |
| Internet Firewall A1051               | 42 |
| IP I/O Door Controller A1081          | 43 |
| Table Stand A8003                     | 43 |
| Wedge corner wall-mount adapter A8001 | 43 |
| Angle corner wall-mount adapter A8002 | 43 |
| Bluetooth Keyfob Remote A8007         | 43 |
| Transponder Key Fob A8005             | 43 |
| References                            | 44 |
| Sustainability                        | 46 |




- Video and audio call  
On smartphones and tablets (iOS, Android) or landline phones (SIP)
- Smart Transmission Mode (STM)  
Real-time audio/video transmission, optimized for mobile devices via WiFi, 3G, 4G, 5G
- Open API  
Local interface for integration with third-party systems and SIP systems
- Automatic door opener  
For use in office and medical practice environments
- Receive packages at any time  
Direct the parcel carrier, e.g. to a neighbor, or open the garage door via smartphone
- Smart Home & NVR compatible  
KNX, Loxone, Synology, KIWI, AVM FRITZ!Fon, URC, Bang & Olufsen, Control4, QNAP, RTI, Nice, Fibaro and many more
- Free visitor history  
Free storage of images and video recordings optionally available
- Geofencing  
Automatic door and gate opening when returning home

## SMART HOME STARTS AT THE FRONT DOOR

DoorBird is the smart solution for your entrance. Connect your DoorBird IP Video Door Station to your smartphone and talk to your visitors even when you are on the move!

The IP Video Door Station can be used as a stand-alone unit or integrated into an existing Smart Home platform. Existing classic installations such as electric door and gate openers can also continue to be used with DoorBird and controlled via the app.

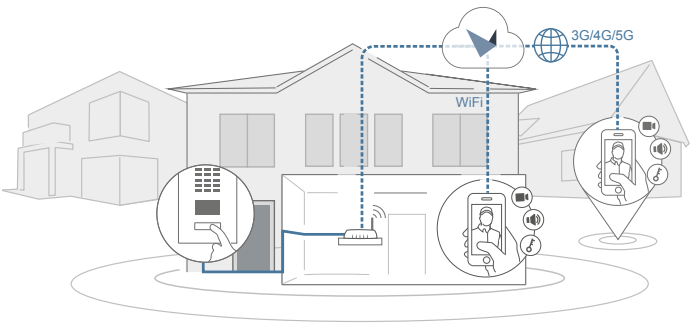

## HOW DOES IT WORK?

Imagine you are not at home and your children have locked themselves out or the parcel carrier is delivering a package. With DoorBird, this is no longer a problem. Every time someone rings the doorbell, you receive a push notification on your smartphone or tablet and can speak to the visitor and see them. You will never miss a visitor again. With DoorBird, you are on the move and still at home, even if a burglar rings the doorbell to check whether someone is home.


## OUR INTERCOM SYSTEMS

From compact entry-level models and classic door stations with call buttons to versatile keypad models, our product range leaves nothing to be desired. With DoorBird, you get the perfect solution for single-family homes as well as for large residential complexes, multi-family buildings, and office buildings.




### D11x

Compact for single-family residence & small business

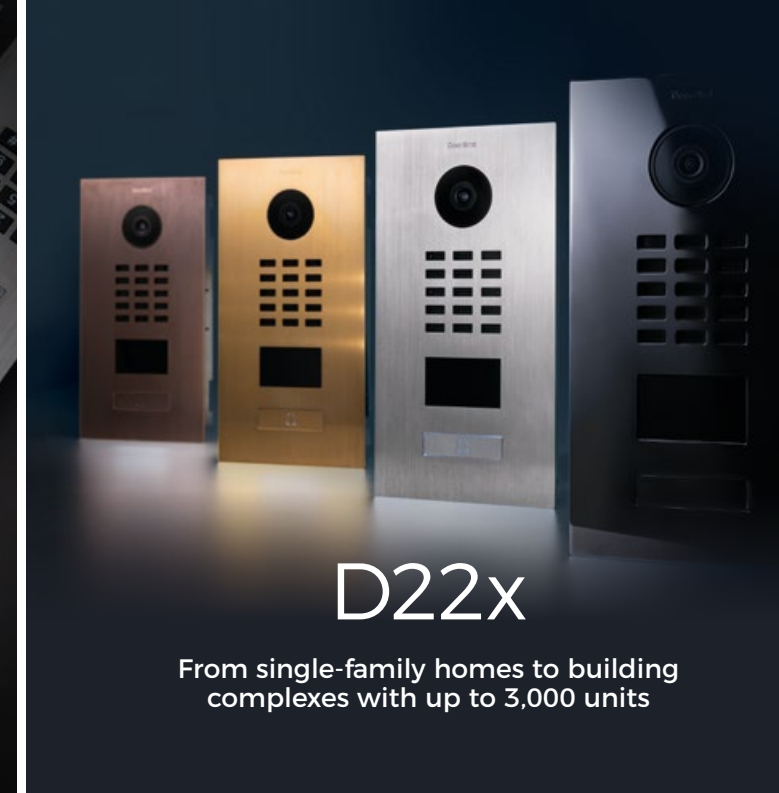

### D22x

From single-family homes to building complexes with up to 3,000 units

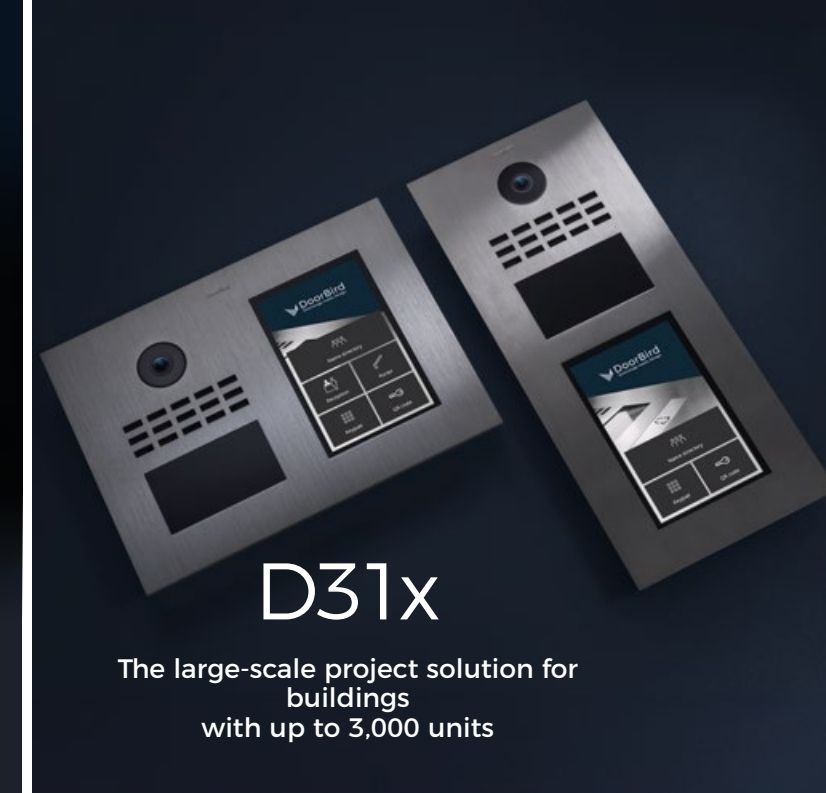

### D31x

The large-scale project solution for buildings with up to 3,000 units

|                                                  | 1080p, WDR, 180° (d) hemispherical lens                   | 5 MP, HDR, 180° (d) hemispherical lens                                         | 1080p, WDR, 180° (d) hemispherical lens<br>D31 5G: 5 MP, HDR         |
|--------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Camera                                           |                                                           |                                                                                |                                                                      |
| Night vision                                     | <input checked="" type="checkbox"/>                       | <input checked="" type="checkbox"/>                                            | <input checked="" type="checkbox"/>                                  |
| 4D motion sensor                                 | <input checked="" type="checkbox"/><br>Range up to 6 m    | <input checked="" type="checkbox"/><br>Range up to 10 m                        | <input checked="" type="checkbox"/><br>Range up to 6 m               |
| Integrated tamper sensor                         | —                                                         | <input checked="" type="checkbox"/>                                            | <input checked="" type="checkbox"/>                                  |
| Configurable switching relays                    | 1                                                         | 2                                                                              | 2                                                                    |
| Configurable digital inputs                      | 1                                                         | 2                                                                              | 1                                                                    |
| 12 V DC output, e.g. for an electric door opener | —                                                         | <input checked="" type="checkbox"/>                                            | —                                                                    |
| Additional interfaces                            | —                                                         | OSDP, RS485, Wiegand, USB-C                                                    | Wiegand, USB-C                                                       |
| Network via PoE                                  | <input checked="" type="checkbox"/><br>IEEE 802.3af       | <input checked="" type="checkbox"/><br>IEEE 802.3at (PoE+)                     | <input checked="" type="checkbox"/><br>IEEE 802.3at (PoE+)           |
| Network via WiFi                                 | <input checked="" type="checkbox"/><br>except for D1101KH | —                                                                              | —                                                                    |
| Bluetooth                                        | <input checked="" type="checkbox"/>                       | <input checked="" type="checkbox"/>                                            | <input checked="" type="checkbox"/>                                  |
| RFID reader                                      | —                                                         | <input checked="" type="checkbox"/><br>125 KHz & 13.56 MHz / 3000 transponders | <input checked="" type="checkbox"/><br>13.56 MHz / 3000 transponders |
| PIN code                                         | <input checked="" type="checkbox"/><br>500 PIN codes      | <input checked="" type="checkbox"/><br>3000 PIN codes                          | <input checked="" type="checkbox"/><br>3000 PIN codes                |
| Fingerprint                                      | <input checked="" type="checkbox"/><br>50 fingerprints    | <input checked="" type="checkbox"/><br>50 fingerprints                         | <input checked="" type="checkbox"/><br>50 fingerprints               |
| QR code                                          | —                                                         | only in the configurator                                                       | <input checked="" type="checkbox"/><br>3000 QR codes                 |
| App access                                       | <input checked="" type="checkbox"/>                       | <input checked="" type="checkbox"/>                                            | <input checked="" type="checkbox"/>                                  |
| PMR symbols and induction loop for accessibility | —                                                         | optional                                                                       | always built-in                                                      |



D11X SERIES  
COMPACT BY DESIGN.  
BIG ON PERFORMANCE.

The D11x series brings modern door communication to single-family homes, medical practices and small businesses in a sleek, space-saving format. Combining high-quality video technology, smart access control and intuitive app connectivity, it offers a seamless user experience without compromising on functionality.

Every D11x model comes standard with Bluetooth and app-based access control, providing convenient and secure access right out of the box. Its clean, modern design blends harmoniously into virtually any architectural style, while easy installation and reliable performance make it the ideal solution for everyday use.

The result is enhanced security, greater convenience and the flexibility to stay connected to your home or business at any time, wherever you are.



D11X SERIES  
1 - 2 call buttons

WiFi-enabled  
Works within a WiFi network, no LAN cable needed


4D 4D motion sensor  
Distance adjustable up to 6 m via the app (interval: 1 m)

Bluetooth Low Energy (BLE)  
For access control, compatible with Bluetooth Keyfob

Small and compact  
For example, enables mounting on door frames

Adjustable view angle  
Precise alignment using wall adapter (separately available for D1101V and D1102V Surface-mount)

Light sensor  
For night vision mode



|                      |                          |                          |                        |                        |                |                 |                      |
|----------------------|--------------------------|--------------------------|------------------------|------------------------|----------------|-----------------|----------------------|
| 0 mm                 |                          |                          |                        |                        |                |                 | 0 mm                 |
| 50 mm<br>(1.96 in)   |                          |                          |                        |                        |                |                 | 50 mm<br>(1.96 in)   |
| 100 mm<br>(3.93 in)  |                          |                          |                        |                        |                |                 | 100 mm<br>(3.93 in)  |
| 150 mm<br>(5.90 in)  |                          |                          |                        |                        |                |                 | 150 mm<br>(5.90 in)  |
| 200 mm<br>(7.87 in)  |                          |                          |                        |                        |                |                 | 200 mm<br>(7.87 in)  |
| 250 mm<br>(9.84 in)  |                          |                          |                        |                        |                |                 | 250 mm<br>(9.84 in)  |
| 300 mm<br>(11.81 in) | D1101KV<br>Surface-mount | D1102KV<br>Surface-mount | D1101KV<br>Flush-mount | D1102KV<br>Flush-mount | D1101KH Modern | D1101KH Classic | 300 mm<br>(11.81 in) |

D11X SERIES  
Access control also via PIN code • 1 - 2 call buttons





Keypad

- Configurable via App & WebAdmin
- Up to 500 individual PIN codes configurable
- Individual events (e.g. switching a relay, HTTP(S) request)



WiFi-enabled

Works within a WiFi network, no LAN cable needed

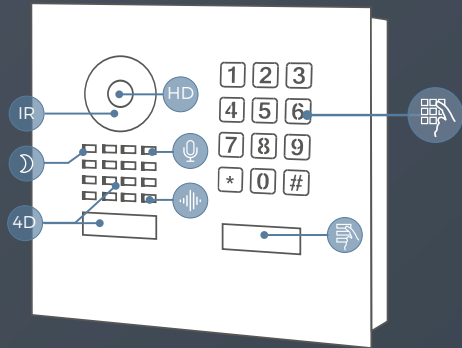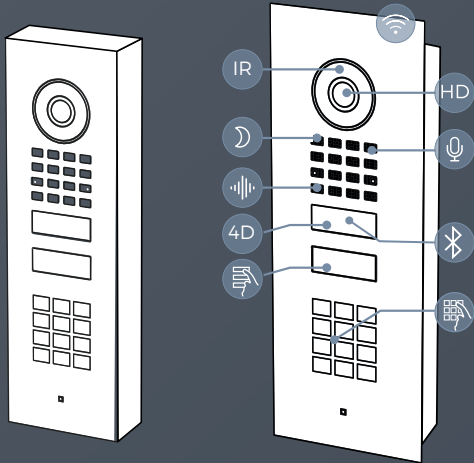

Keypad

- Configurable via App & WebAdmin
- Up to 500 individual PIN codes configurable
- Individual events (e.g. switching a relay, HTTP(S) request)



D1101KH Classic  
Surface-mount



D1101KH Modern  
Surface-mount





|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------|
|  |  |  |  | 0 mm                 |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     | 50 mm<br>(1.96 in)   |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     | 100 mm<br>(3.93 in)  |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     | 150 mm<br>(5.90 in)  |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     | 200 mm<br>(7.87 in)  |
|                                                                                     |                                                                                     |                                                                                     |                                                                                     | 250 mm<br>(9.84 in)  |
| D1101FV<br>fingerprint 50<br>Surface-mount                                          | D1102FV<br>fingerprint 50<br>Surface-mount                                          | D1101FV<br>fingerprint 50<br>Flush-mount                                            | D1102FV<br>fingerprint 50<br>Flush-mount                                            | 300 mm<br>(11.81 in) |

D11X SERIES  
Access control also via fingerprint · 1 - 2 call buttons

WiFi-enabled  
Works within a WiFi network,  
no LAN cable needed

Fingerprint reader  
• Supported number of  
fingerprints: 50  
• Status LED (RGB)  
• Touch sensor

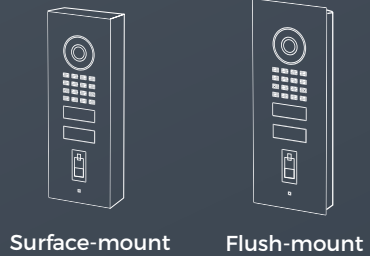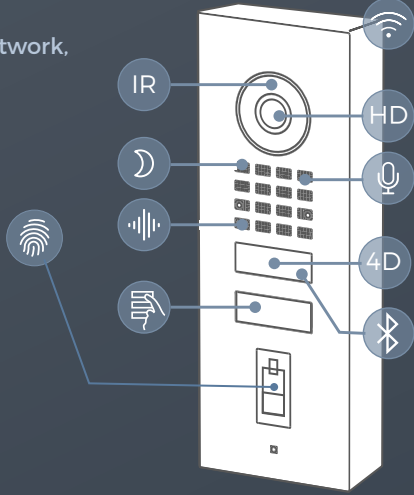




## D22X SERIES THE ALL-ROUNDER FOR MODERN DOOR COMMUNICATION.

The D22x series is the versatile solution for modern door communication, combining advanced technology, flexible configuration options and premium design. Whether used in single-family homes, multi-family buildings, office buildings or mixed-use properties, it adapts seamlessly to a wide range of project requirements. As the successor to the D21x series, it builds on a proven platform while offering greater performance, expanded access control options and even more customization possibilities. All D22x models come standard with RFID, Bluetooth and app-based access control, providing a wide range of convenient access options right out of the box.

With high-resolution video quality, intelligent app connectivity and support for various authentication methods, the D22x series delivers a secure and convenient user experience. Its modular architecture, broad range of finishes and compatibility with displays and accessories make it the ideal choice for projects that demand both maximum flexibility and a premium appearance.

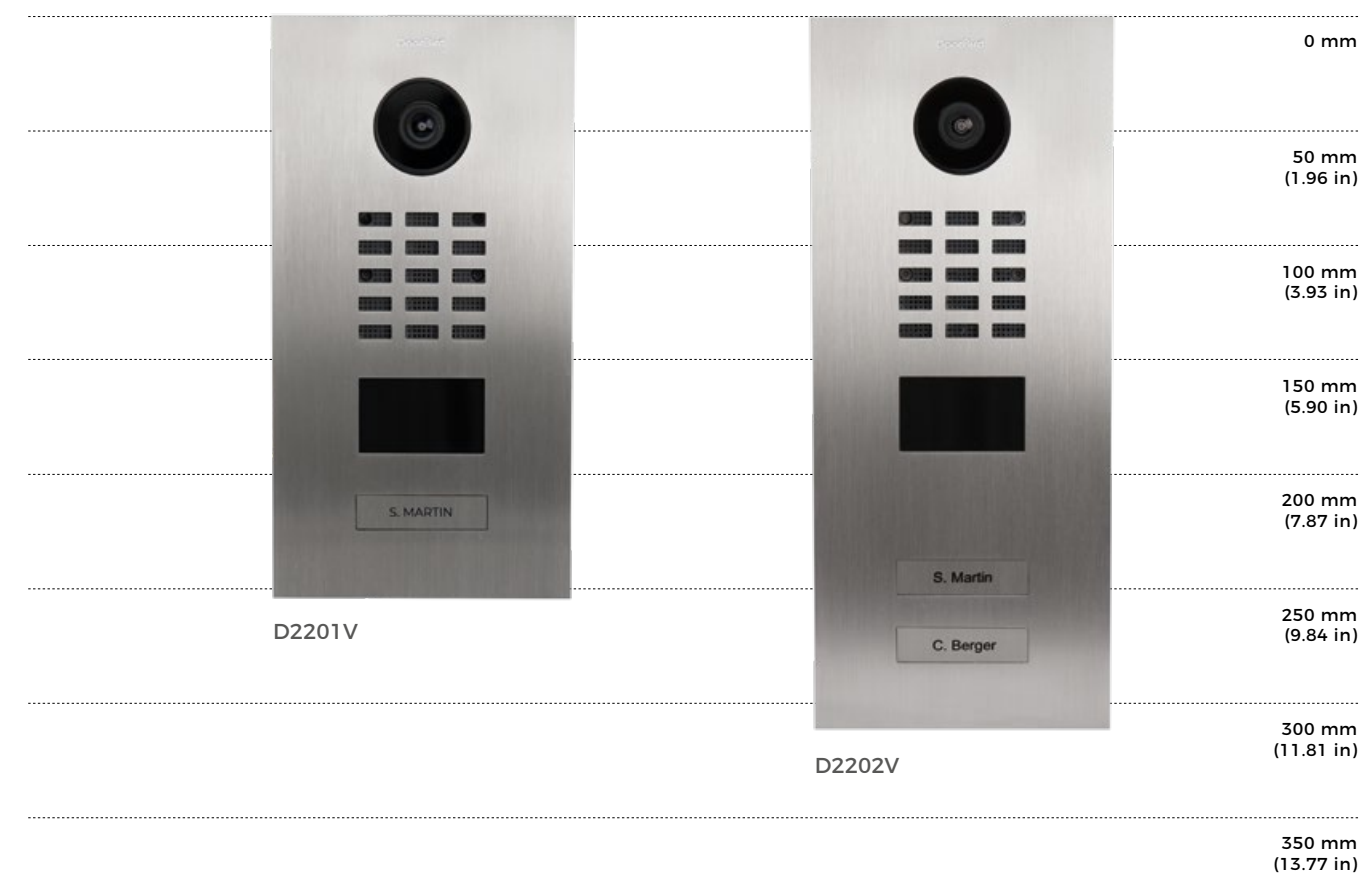

D22X SERIES  
1 - 2 call buttons

-  **125 KHz & 13.56 MHz**
  - Configurable remotely via App & WebAdmin (e.g. time windows)

-  **Light sensor**
  - For night vision mode

-  **Bluetooth Low Energy (BLE)**
  - For access control with DoorBird Bluetooth Keyfob Remote A8007

-  **Two freely configurable bi-stable switching relays**
  - Two doors or gates can be controlled
  - Status configurable via App & WebAdmin: temporary or permanent switching

- 5MP 5 MP camera**
  - Ultra wide-angle, hemispherical lens, 180°


- IR Night vision**
  - With infrared LEDs



-  **Noise reduction and echo cancellation (AEC, ANR)**

- 4D Motion sensor with 4D technology**
  - Distance up to 10 m adjustable via App & WebAdmin (interval: 1 m)

-  **Easy connection to the network**
  - Connection via network cable or bell wire using the 2-Wire Ethernet PoE+ Converter (PoE, network data)

-  **Individual time and action schedules, e.g.:**
  - RFID Key Fob "abc" has access only on Wednesday from 9 am to 11 am
  - 4D motion sensor switches on an external lamp between 9 pm and 6 am

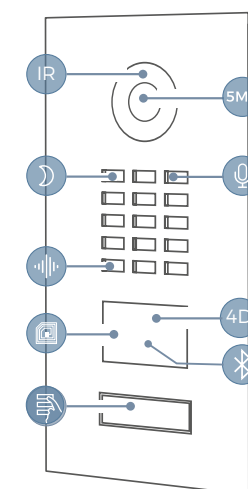

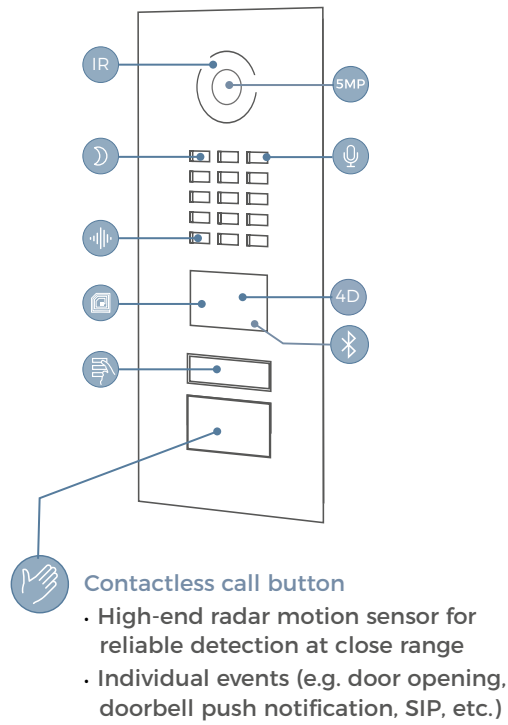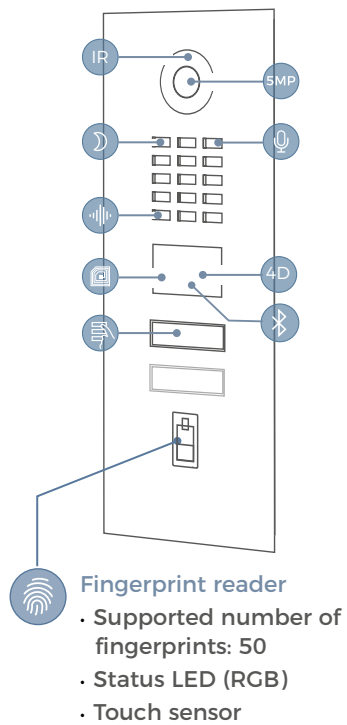


## WAVE HAND TO RING



The contactless call button module features an intelligent motion sensor that reliably detects the approach of a hand within a range of 10 cm, based on radar technology.

Visitors can trigger the door call and open the door hygienically and intuitively with a simple hand movement. Since our motion sensor can also detect the approach of an object, it also works if, for example, you do not have a free hand and are holding a package in front of it.



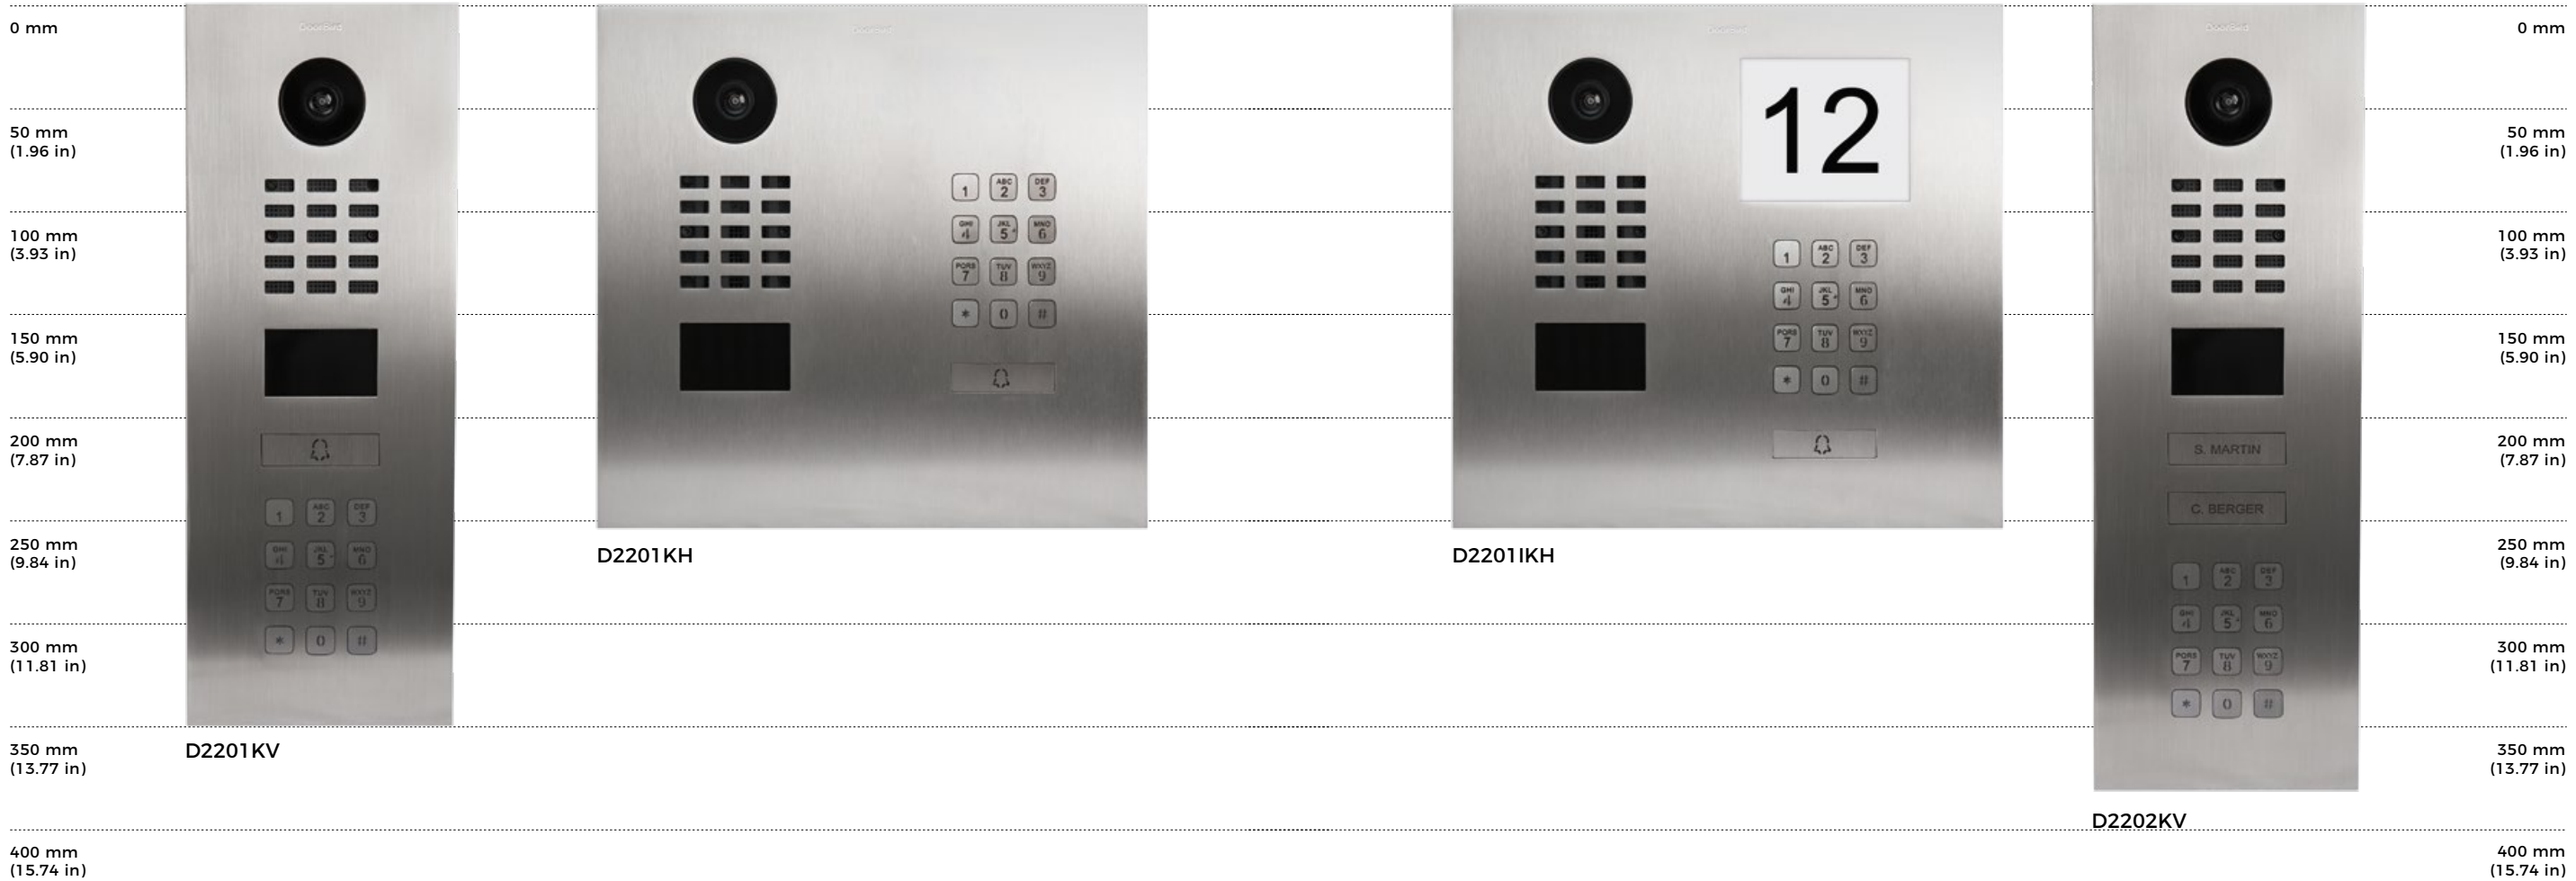


D22X SERIES  
Access control also via PIN code · 1 - 2 call buttons

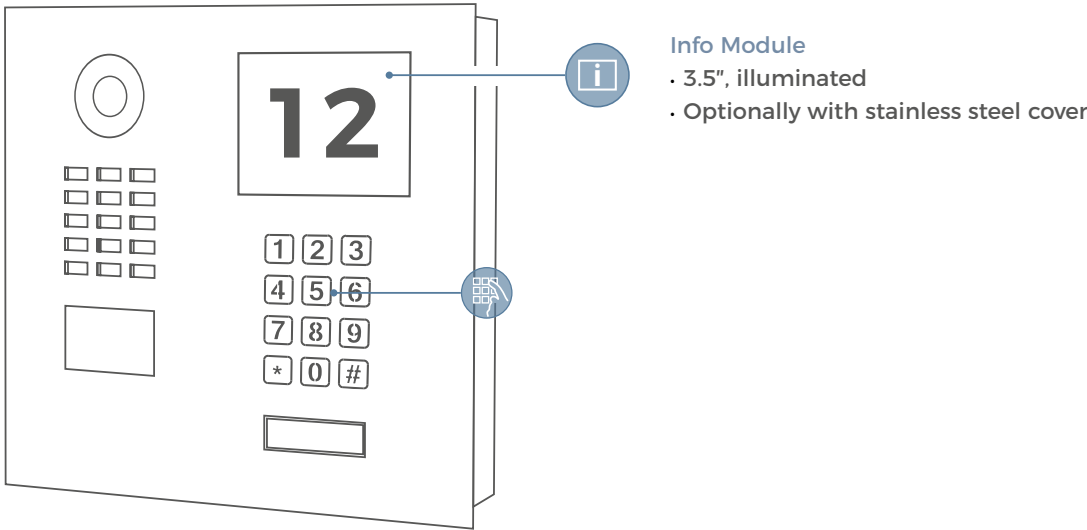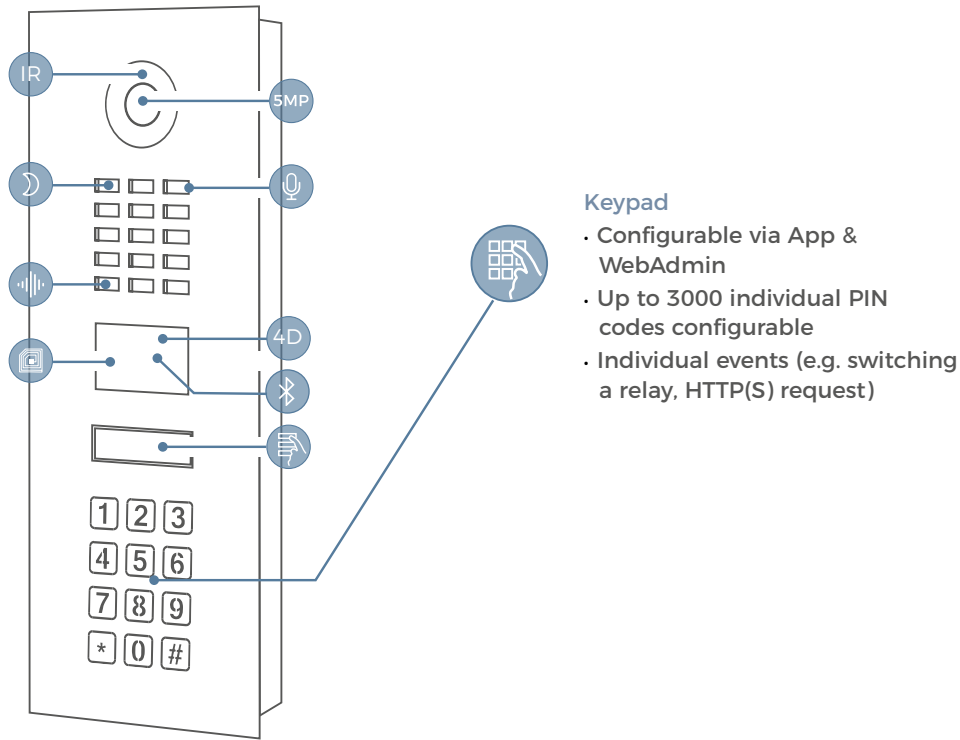



D22X SERIES  
3 - 18 call buttons

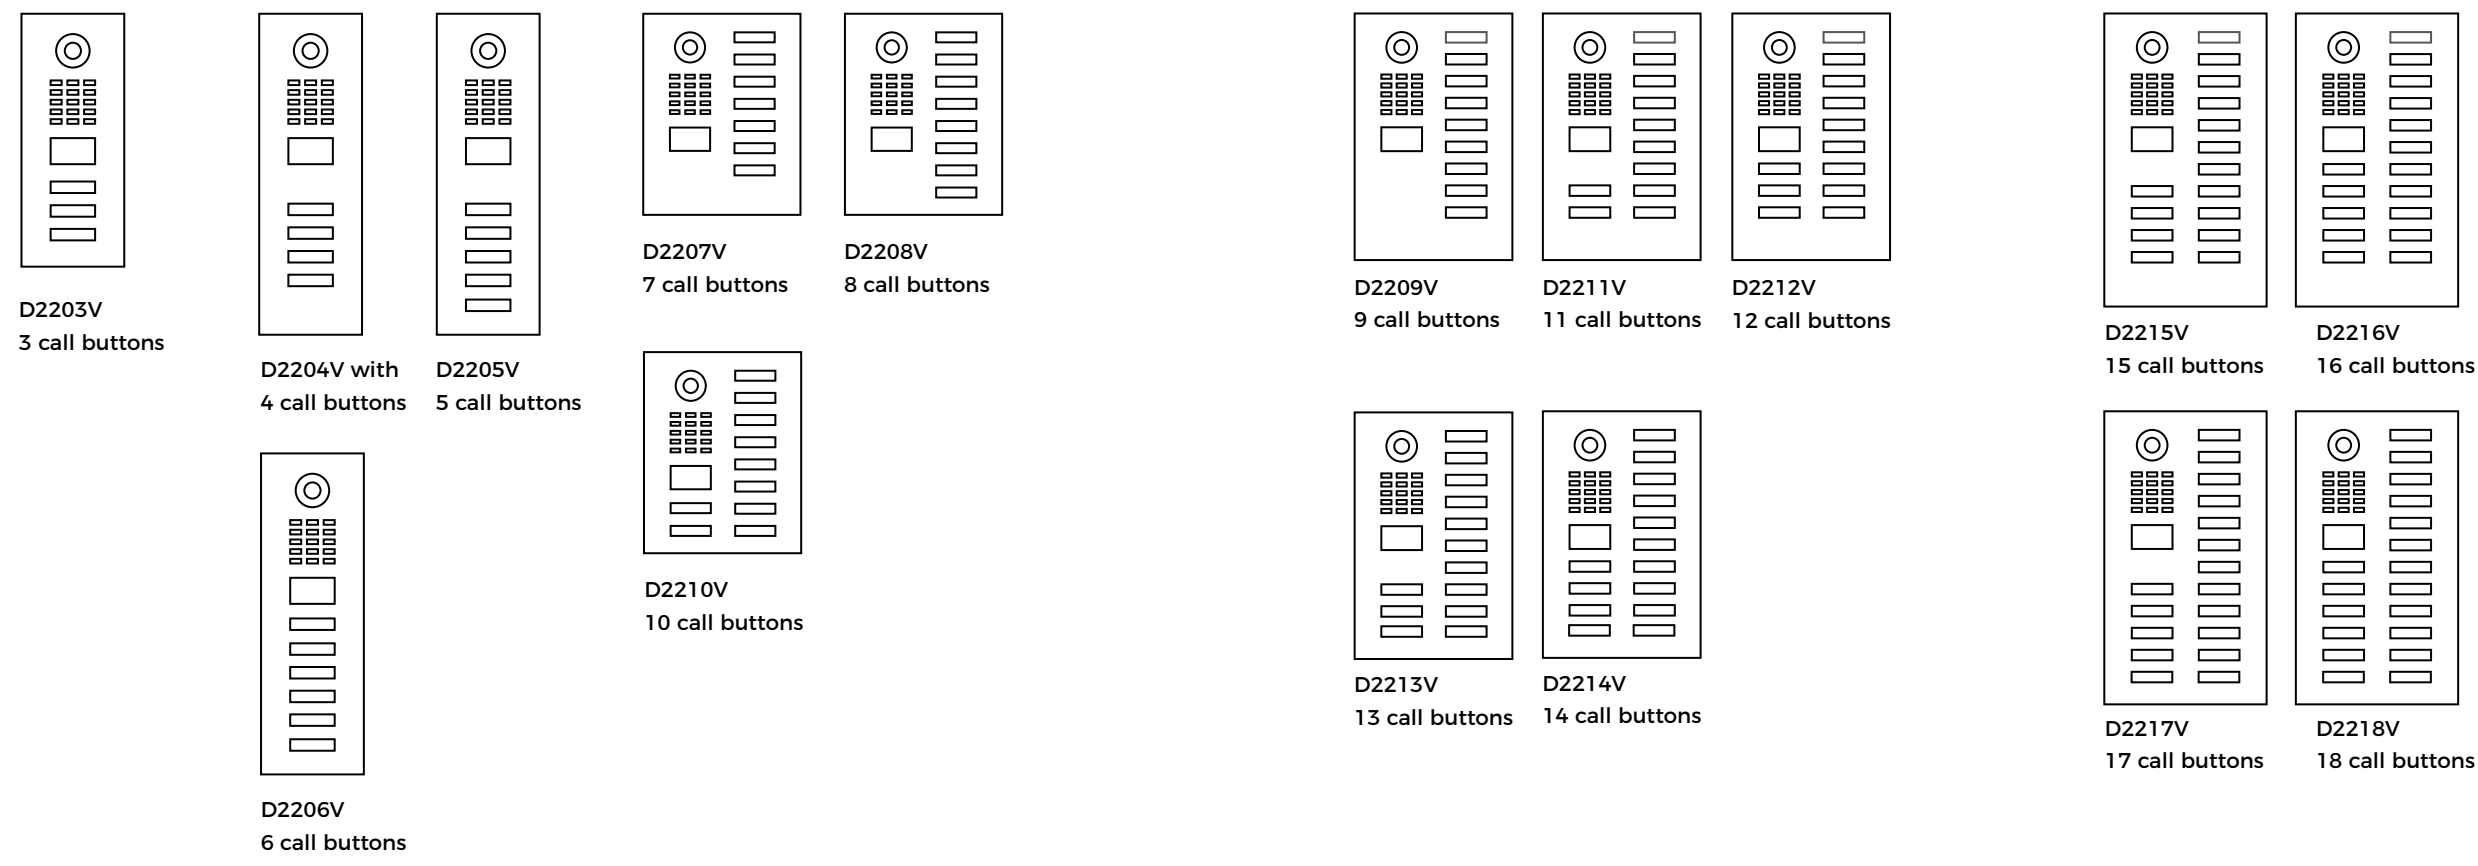


# DIGITAL NAMEPLATES – FLEXIBLE, MODERN, EFFICIENT



Digital nameplates offer maximum flexibility and enable quick, centralized updates at any time and without the need for physical replacement. Labels can be updated whenever needed, for example in the case of tenant changes or organizational adjustments. This keeps the display accurate and up to date at all times.

The content of digital nameplates can be conveniently managed and adjusted remotely via DoorBird WebAdmin. Changes are made centrally, without requiring on-site intervention. This significantly simplifies maintenance, especially for larger or decentralized installations.




D22X SERIES  
4 - 18 call buttons with digital nameplates

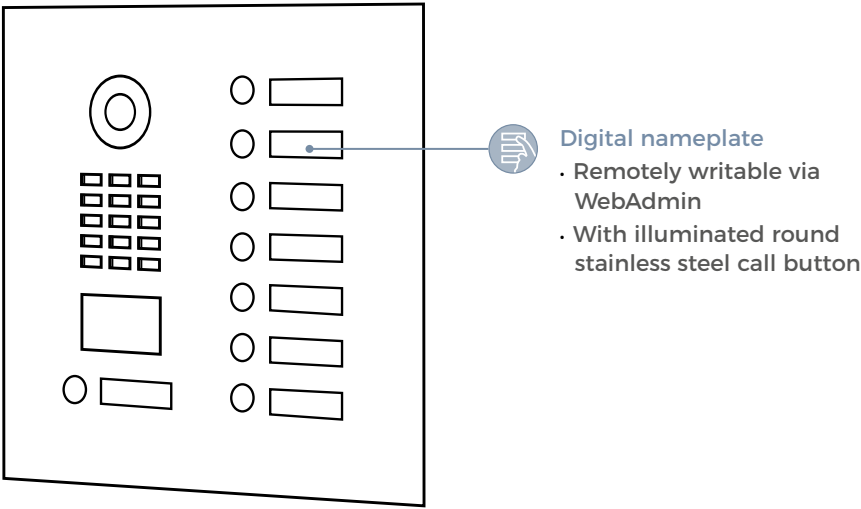

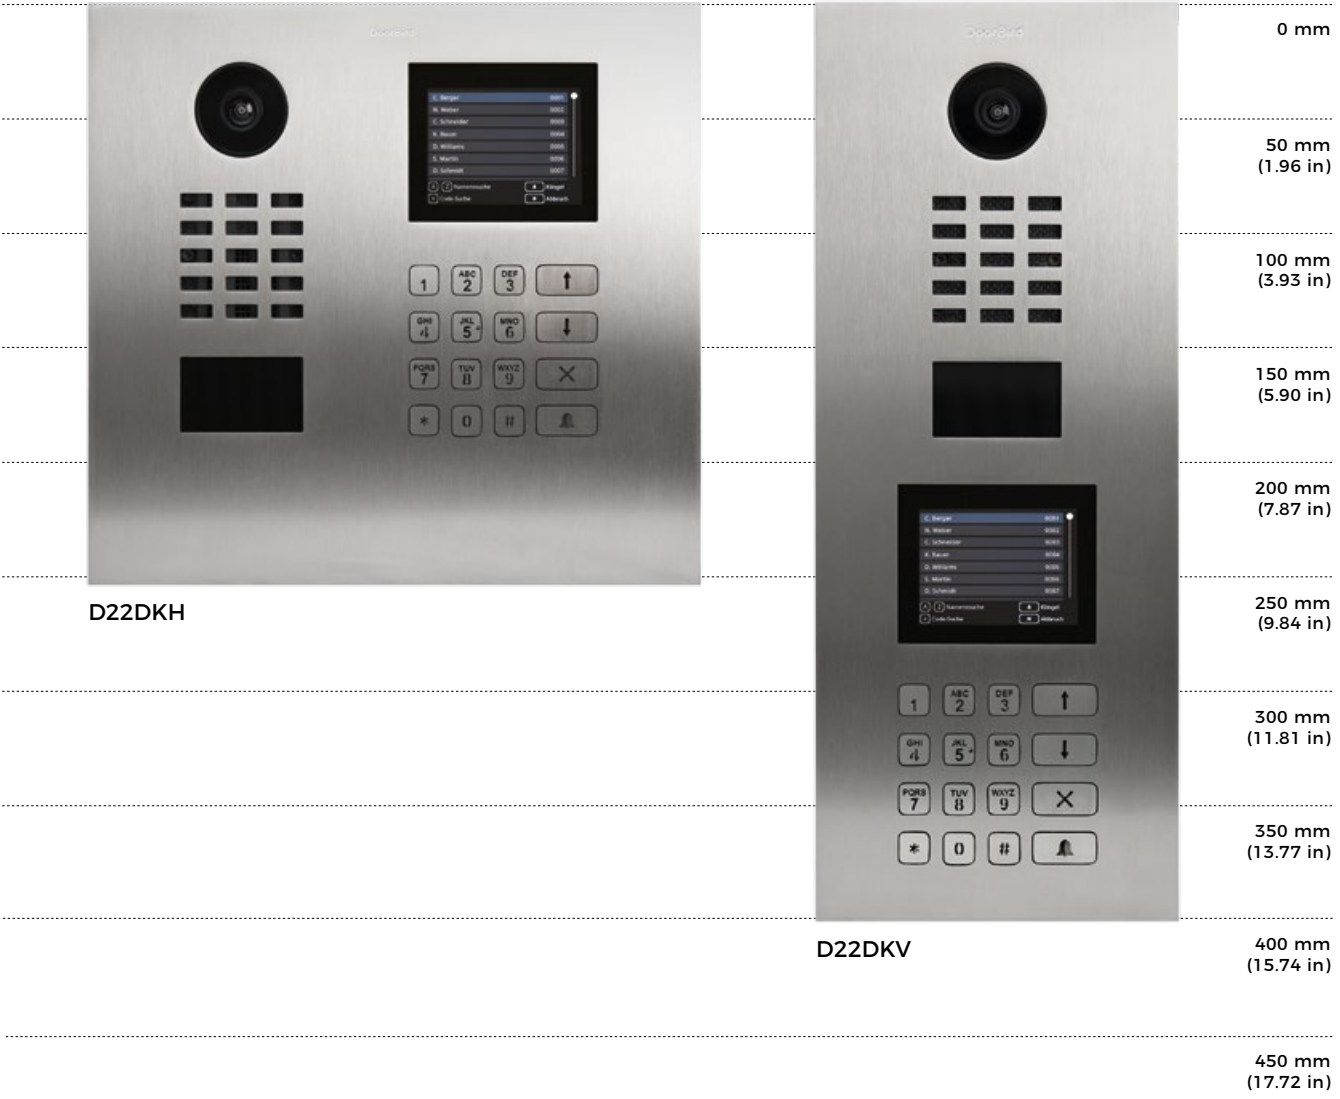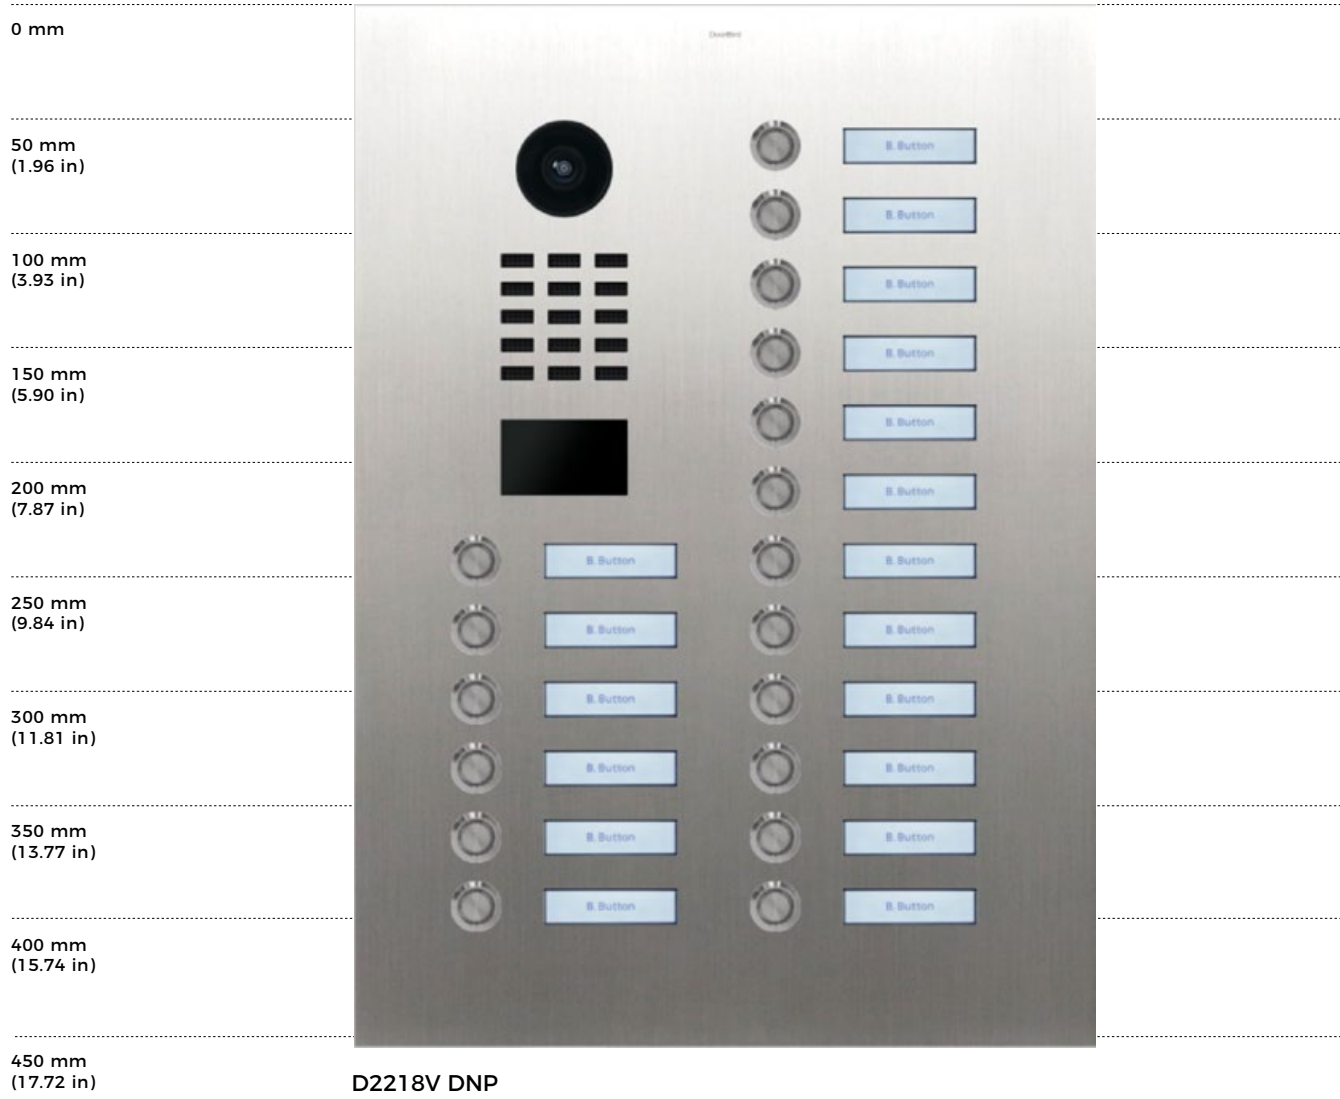

D22X SERIES  
Access control also via PIN code • for buildings with 1 - 3,000 units

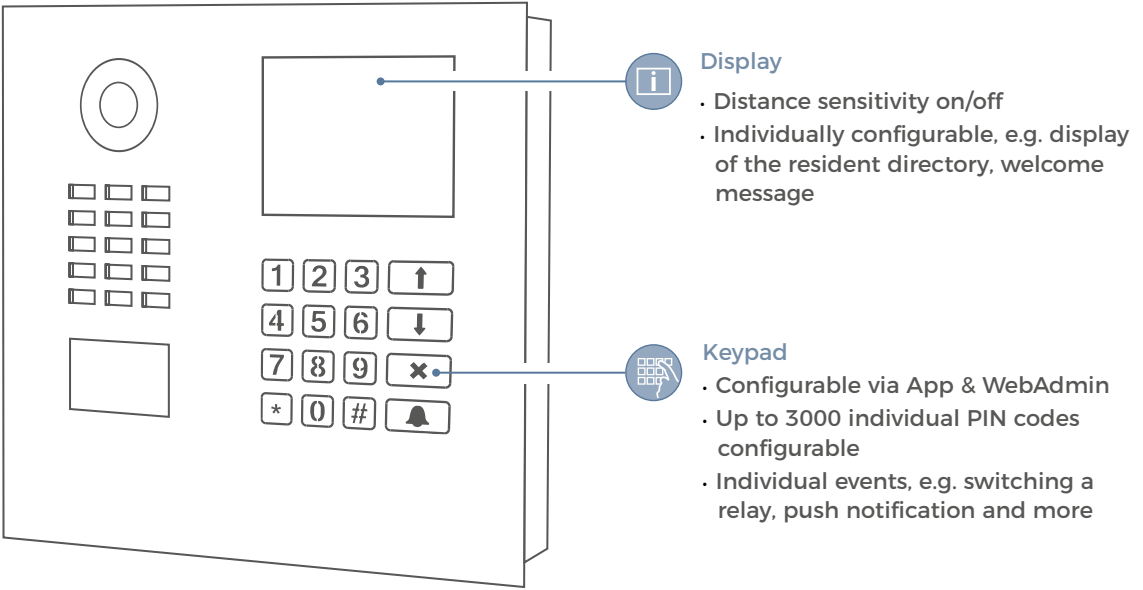



red dot winner 2026



# D31X SERIES THE PREMIUM SOLUTION FOR LARGE-SCALE PROJECTS

The D31x series combines premium design, advanced functionality and intuitive usability in one platform. The ultra-bright 7" touch display can be configured individually to meet the requirements of each installation, remains easy to read even in direct sunlight and is reliable to operate even in adverse weather conditions. Power and network data are supplied via PoE+, so only one network cable is required. Alternatively, the optional DoorBird 2-Wire PoE+ Converter enables easy modernization of existing installations.

The integrated Sony Starvis™ image sensor with WDR delivers outstanding image quality day and night. Depending on the model, the D31x series is available with 1080p HD or 5 MP camera technology and enables sharp, detailed visitor identification. RFID, Bluetooth, PIN code, QR code and app-based access control come standard across the entire series and provide maximum flexibility for residential buildings, commercial properties and mixed-use buildings. An integrated accessibility module additionally ensures a convenient and inclusive user experience.




## QR code reader

- Configurable via App & WebAdmin
- Individual QR codes for access control

## Virtual keypad

- Configurable via App & WebAdmin
- Up to 3000 individual PIN codes configurable
- Individual events, e.g. switching a relay, push notification and much more

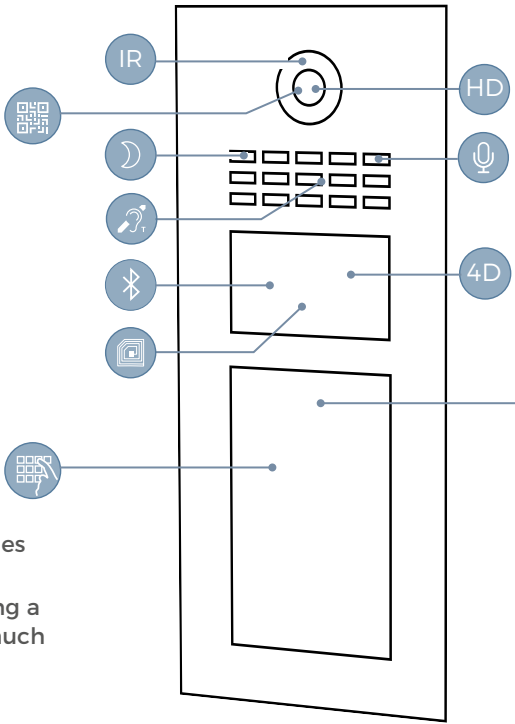



## Wiegand Interface

- Output of keypad and RFID reader

## Display

- 7" ultra-bright touch display
- Touch can also be operated in wet conditions
- Easy to replace
- Individually configurable, e.g. display of the resident directory with logos, welcome screen, tiles for shortcuts

D31X SERIES  
Access control also via PIN code & QR code • for buildings with 1 - 3,000 units

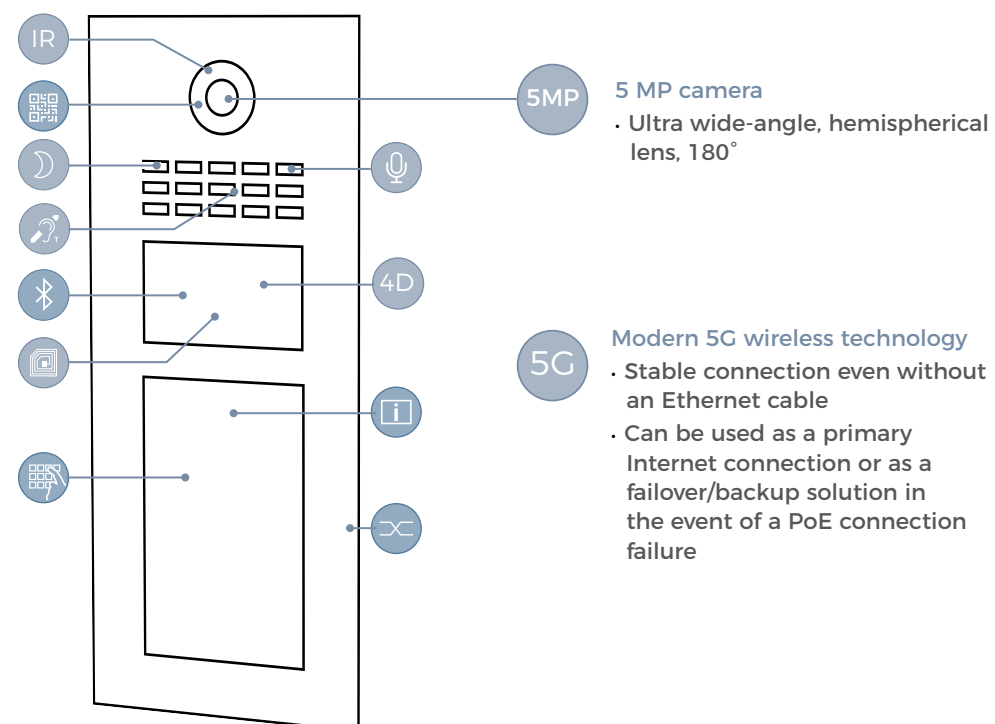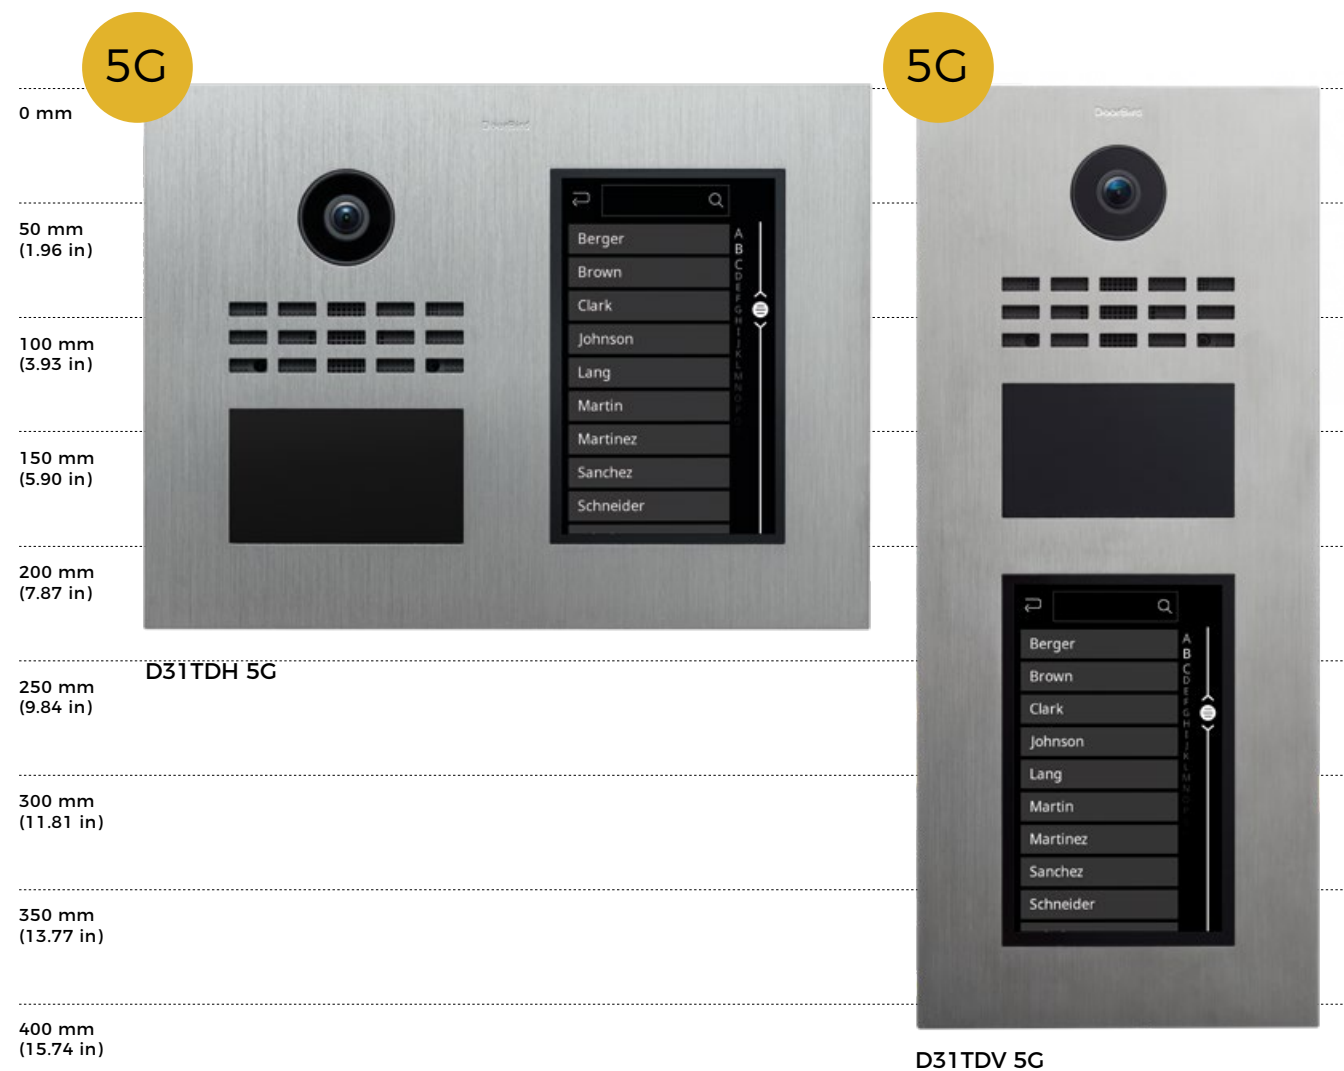

## IP VIDEO DOOR STATION WITH 5G

The IP Video Door Station offers maximum flexibility: it requires neither a hardwired Internet connection such as DSL nor network cabling in the building. Thanks to integrated 5G technology, the door station connects directly to the Internet independently of the existing network.

This makes it the ideal solution for new buildings as well as for the modernization of existing buildings, bringing all the advantages of digital door communication to any location without installation effort. Residents and users receive the doorbell signal, video and audio in real time and in excellent quality directly on their smartphone, tablet, installed indoor station or SIP phone via the DoorBird app.

**D31X SERIES**  
Access control also via PIN code & QR code • for buildings with 1 - 3,000 units




Surface-mounted letterbox or fence system



Letterbox flush-mounted



Letterbox wall pass-through

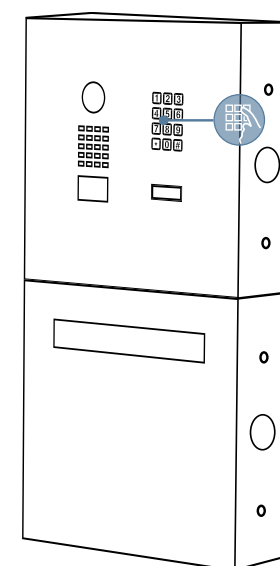

Also available as a fence system

## LETTERBOXES WITH ALL THE ADVANTAGES OF THE D22X SERIES

DoorBird letterbox systems are custom-made according to customer requirements. They are manufactured in Germany according to the highest quality standards. Each high-quality letterbox system is equipped with a DoorBird IP Video Door Station.

You can design your own letterbox using our easy-to-use 3D configurator. You immediately receive the price, delivery time and technical drawing. The letterbox is manufactured individually for you as a custom-made product.

## SMART VARIETY

Are you looking for a personalized, custom-made solution that goes beyond what we offer in our shop? Then use our online configurator and design your customized DoorBird in just a few steps! You can choose the dimensions, finish, color and equipment according to your wishes.

More information at:  
[www.doorbird.com/configurator](http://www.doorbird.com/configurator)

Now also with  
digital nameplate –  
remotely editable!



B. Button

## ACCESSIBILITY MODULE

Our IP Video Door Station can be expanded with the "Accessibility Module" for people with impaired hearing using our 3D configurator with just one click. The module was developed for use in public buildings, kindergartens, educational institutions, hospitals, public transport and retirement homes and complies with DIN 18040 for barrier-free construction. In France, integration of the module is an integral part of building regulations. With this module, the door station is expanded with a status display and a hearing loop.

The status display with three pictograms (call, conversation, door opening) makes communication easier for people with hearing impairment by visually showing the current status of the door station.



The hearing loop or induction loop is used for wireless sound transmission from the door station to the hearing aid. With this function, you can not only meet the required standards but also make communication, for example with reception, significantly easier for everyone wearing a hearing aid. The hearing loop we developed has an internal antenna, so the design of the door station is fully retained.

On request, the door station can also be supplemented with Braille so that visually impaired or blind people can better feel texts and information and operate the door station intuitively.

# MORE THAN 50 FINISHES AND COLORS!


Design your DoorBird individually and according to your wishes\*



Chrome finish, polished



Stainless steel, brushed



Bronze finish, brushed




Brass finish, polished



Titanium finish, brushed



Titanium finish, polished



Gold finish, brushed



Real burnished brass



Architectural bronze

|          |          |                              |
|----------|----------|------------------------------|
| RAL 1001 | RAL 1003 | RAL 1004                     |
| RAL 1016 | RAL 1017 | RAL 1037                     |
| RAL 2002 | RAL 2004 | RAL 3000                     |
| RAL 3007 | RAL 3014 | RAL 3028                     |
| RAL 4004 | RAL 4005 | RAL 4006                     |
| RAL 4009 | RAL 5002 | RAL 5004                     |
| RAL 5012 | RAL 5013 | RAL 5018                     |
| RAL 5022 | RAL 6000 | RAL 6006                     |
| RAL 6018 | RAL 6019 | RAL 6027                     |
| RAL 7001 | RAL 7004 | RAL 7006                     |
| RAL 7011 | RAL 7015 | RAL 7016                     |
| RAL 7023 | RAL 7033 | RAL 7044                     |
| RAL 8004 | RAL 8011 | RAL 8016                     |
| RAL 8023 | RAL 8028 | RAL 9002                     |
| RAL 9006 | RAL 9007 | RAL 9010                     |
| RAL 9016 | DB 703   | Graphite Black (Polar Raven) |

\*The colors shown are not color-binding and are not available as standard for all models. For precise color determination, we recommend using a valid RAL color register. For more options and custom systems, contact us directly or use our 3D Configurator.



## IP VIDEO INDOOR STATIONS

The DoorBird IP Video Indoor Stations are the ideal complement to any DoorBird IP Video Door Station. They stand out thanks to excellent video and audio quality. Their compact, discreet design blends harmoniously into any environment.

The display of our indoor stations is made of scratch-resistant safety glass. Thanks to the intuitive user interface with clear icons, all functions are accessible within seconds. Operation is intuitive, convenient and suitable for all age groups.

With an individual chime tone for the front door, floor entrance or gate, you can easily identify where the visitor is ringing. The LED status bar of the indoor station lights up in freely selectable colors.

Installation of the indoor station is completed in less than 10 minutes. The network connection is established via WiFi or network cable. When connected via network cable, the indoor station can be powered conveniently via Power over Ethernet (PoE). Should the Internet fail, all functions of the indoor station and the connected DoorBird door stations remain available within the local network. Via the Internet, the indoor station can access all connected DoorBird door stations anywhere in the world.



When more than one indoor station is used, room-to-room communication between all indoor stations is supported. A SIP telephone can also be called at the touch of a button, for example to contact a concierge or caretaker. Calls from the SIP telephone to the indoor station and door station are also possible.

## SMART FEATURES

- Door opener and elevator control
- Visitor history (free cloud recording)
- Room-to-room communication when using several indoor stations
- SIP support, e.g. for calls from concierges or facility managers
- Weather forecast
- Home and building automation control (IP, TCP, HTTPS, relays, etc.)
- Configurable via the DoorBird App and the web-based dashboard, worldwide
- Compatible with smart locks and the DoorBird IP Video Mini Dome Camera

A1103 series



A1104 series

### Two-way audio

- HD audio, up to 102 dB
- More than 50 doorbell sounds

### Compact housing

- Configurable RGB LED status bar

### Unlimited range


- Supports WiFi, Ethernet, PoE
- Suitable for several DoorBird IP Video Door Stations

### Optional functions

- Automatic door opening system, e.g. for offices




A1101 series

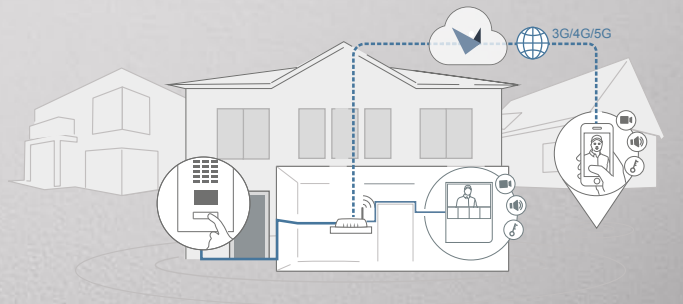


## A1101 IP VIDEO INDOOR STATION

- 4" True Color touch display
- 5 hardware buttons for the main functions
- Available in black and white

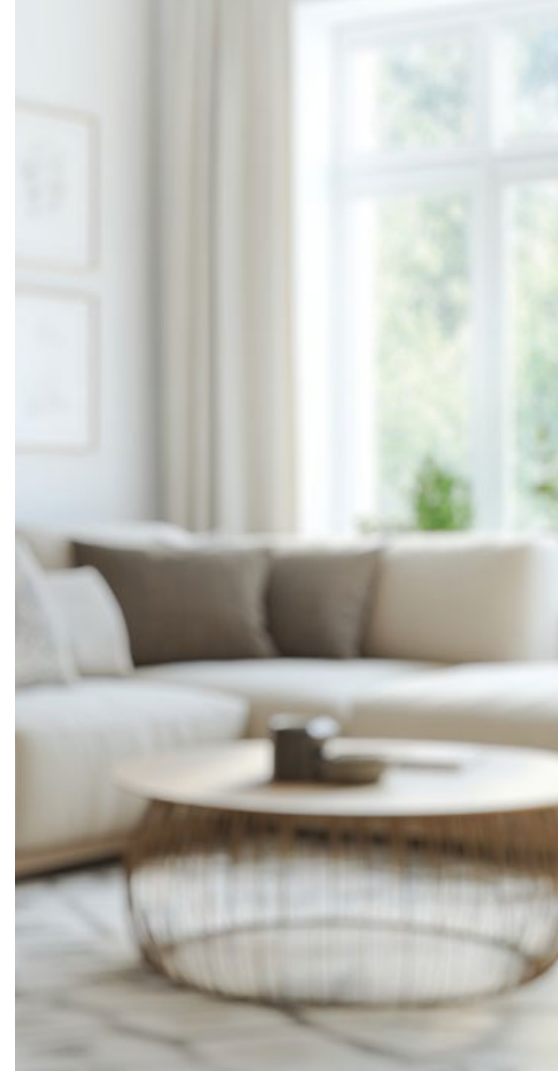


## A1103 AND A1103T IP VIDEO INDOOR STATION

- 7" True Color touch display
- Touch bar with 4 buttons for the main functions
- Available in black and white
- A1103T includes integrated induction loop

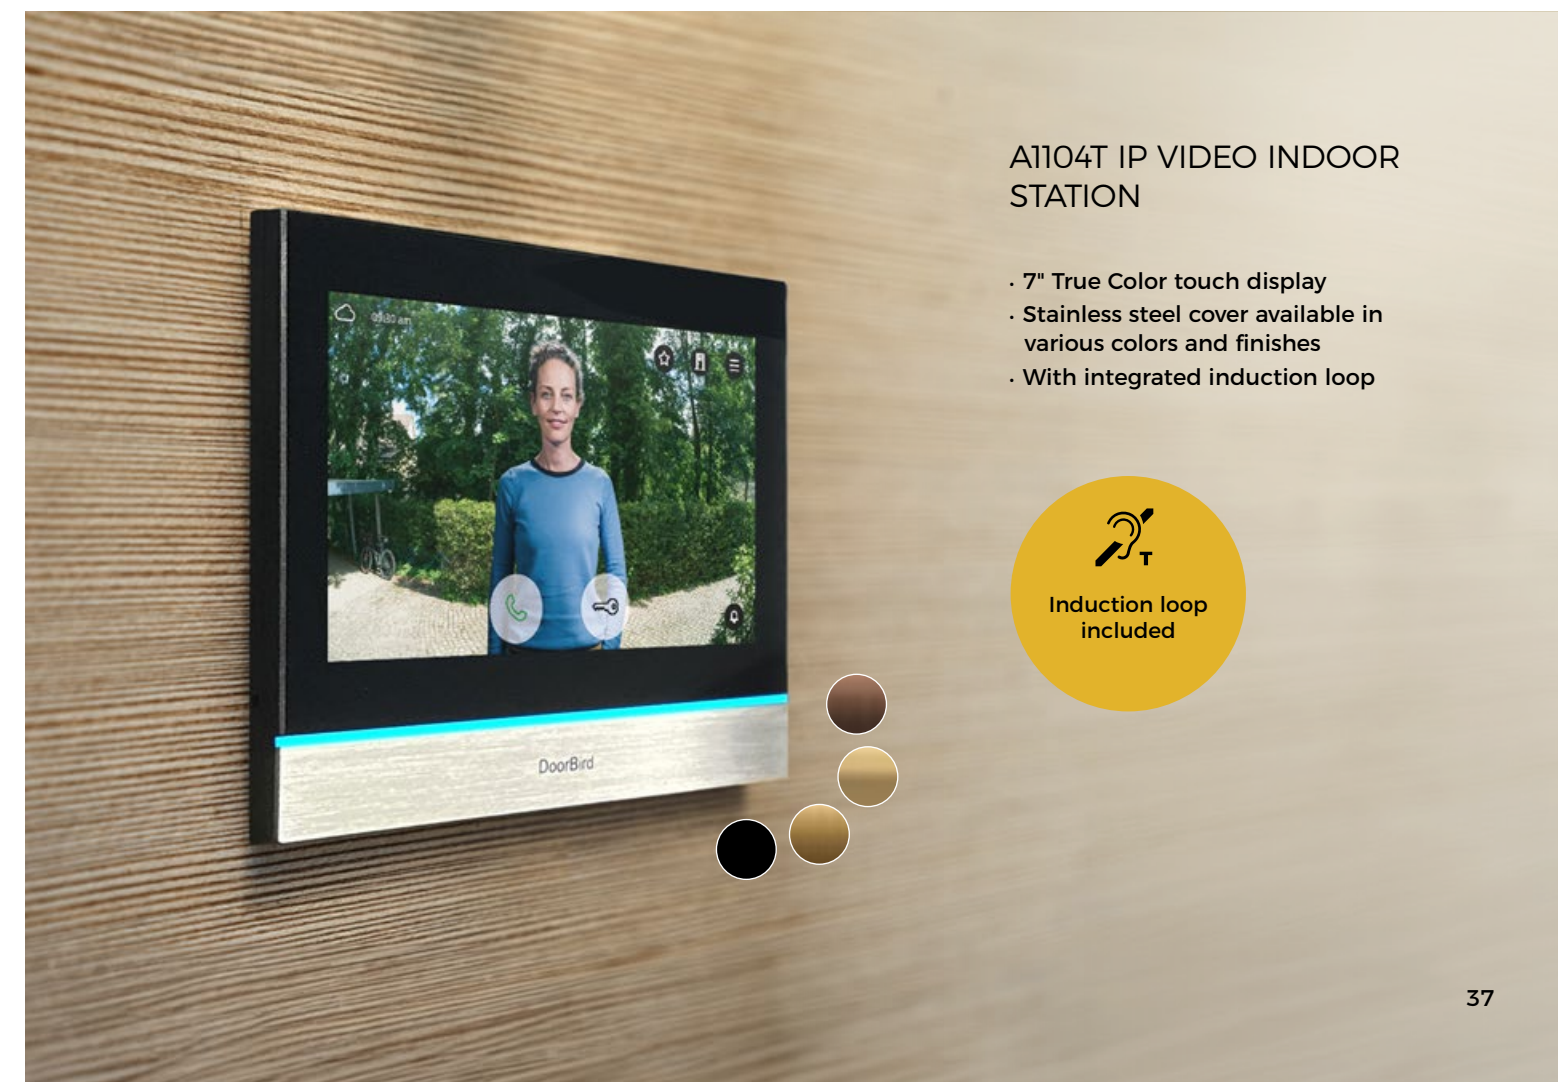

## A1104T IP VIDEO INDOOR STATION

- 7" True Color touch display
- Stainless steel cover available in various colors and finishes
- With integrated induction loop



## A1131 IP VIDEO MINI DOME CAMERA

The DoorBird IP Video Mini Dome Camera A1131 is a compact 2 MP Full HD camera for entrance areas with increased security requirements. In some installations, it is necessary for visitors not to be visible only via the camera of the door station, since visitors may, for example, cover the door station camera or turn to the side. Thanks to the Sony Starvis™ image sensor, the Mini Dome Camera delivers excellent image quality even in difficult lighting conditions. In addition, thanks to WDR (Wide Dynamic Range), it delivers clear images even when dark and bright areas are present in the scene at the same time, for example in backlighting.

The Mini Dome Camera can be installed indoors or outdoors in less than 10 minutes, on a ceiling or wall. The connection to the network is made via network cable and PoE (recommended), alternatively via WiFi.

All connected DoorBird apps and DoorBird IP Video Indoor Stations can access the image from the Mini Dome Camera via LAN and the Internet.


### ADVANTAGES

- Compact, unobtrusive design
- Robust metal housing
- Outstanding image quality with 2 MP
- Sony Starvis™ image sensor with WDR
- AI processor with Deep Learning Accelerator (DLA)
- Suitable for indoor and outdoor mounting on a ceiling or wall
- PoE and WiFi-capable (separate WiFi Kit A8010 required)
- Open API for third-party applications such as automatic license plate recognition (ANPR) for gate opening

An external motion detector (DoorBird A8008), a WiFi Kit (DoorBird A8010) and a surface-mounted connection box (DoorBird A8009) for accommodating excess network or power cables are optionally available for the IP Video Mini Dome Camera A1131.

Video Motion Detection (VMD) will be available via a free software update in the course of 2026.

### ACCESSORIES



WiFi Kit A8010



4D radar motion sensor A8008



Cable Management Box A8009



**HD** HD-Video  
Ultra wide-angle,  
hemispherical lens, 136.4°

**IR** Night vision  
With infrared LEDs

**Light sensor**  
For night vision mode

**Angle settings**  
Lens mount: Pan -120°~165°,  
Tilt 30°~90° (manual)



**Smart Home & NVR compatible**  
KNX, Loxone,  
Synology, KIWI, AVM  
FRITZ!Fon, URC, Bang  
& Olufsen, Control4,  
QNAP, RTI, Nice,  
Fibaro and many more



**Easy installation**  
Quick installation via  
QR code scan



**Smart Transmission Mode (STM)**  
Real-time video  
transmission, optimized for  
mobile devices via WiFi, 3G,  
4G, 5G



**Open API**  
Local interface for  
integration with third-party  
systems and SIP systems



**Easy connection to the network**  
Connection via network cable  
or bell wire using the 2-Wire  
Ethernet PoE Converter  
"DoorBird A1072" (PoE,  
network data)



**WiFi-capable**  
Works within a WiFi network, no  
LAN cable needed (separately  
available DoorBird WiFi Kit  
A8010 required)



**Free visitor history**  
Free storage of images,  
video recordings  
optionally available




**External input**  
For external motion  
detector or alarm  
contact

# SMART ACCESS CONTROL

The DoorBird A1121 and A1122 are compact, IP-based multi-technology access control systems that can also be installed as a stand-alone solution. They enable secure access control in areas where the installation of an IP Video Door Station is not possible or desired, e.g. at back and side doors, garages and underground garages, storage and packing rooms, or bicycle and machine rooms. Elevator control is also possible.

-  125 KHz RFID reader
-  WiFi-enabled
-  13.56 MHz RFID reader
-  Bluetooth®
-  Wiegand interface
-  Tamper sensor

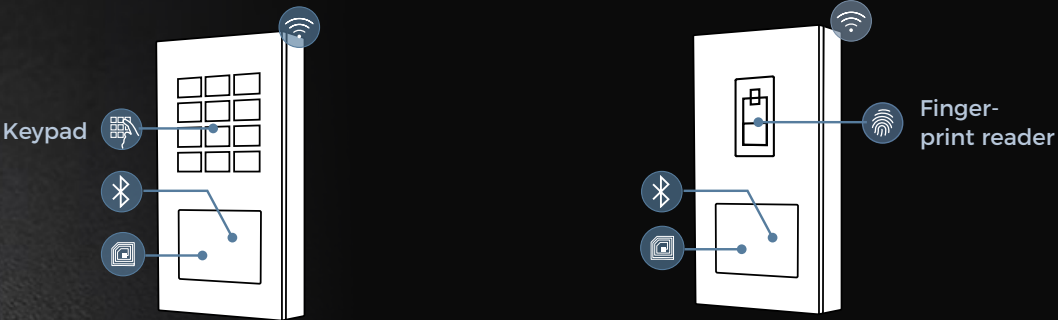

## SMART DOOR CONTROLLER D410


In residential buildings as well as office buildings, your doors can easily be digitized retroactively with the D410 Smart Door Controller.

- Upgrade of existing doorbell and intercom systems
- Access control via DoorBird App and A8007 Bluetooth remote control
- Easy installation and setup for existing properties and new construction
- Increased security through encrypted communication
- Quick and easy management via smartphone and PC
- Management of permissions and time profiles in real time



## GIGABIT HIGH-POE INJECTOR A1093

- Provides power and data via an Ethernet cable for easy network expansion
- Compatible with High-Power PoE+ IEEE 802.3at and PoE IEEE 802.3af devices
- Up to 1000-Mbit/s Gigabit Ethernet transmission speed
- Plug-and-play, no configuration required
- Simple and fast installation
- For mounting on walls, ceilings or in control cabinets (DIN rail)

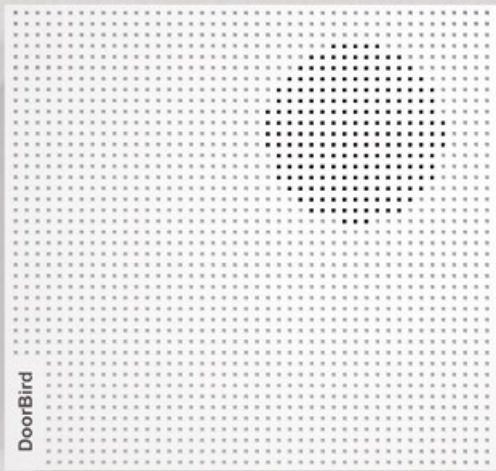

A1061W

### IP DOOR CHIME A1061W

- Front door and storey-call option
- WiFi, Ethernet, PoE
- Configurable worldwide via the app
- Works online or on the local network
- Multiple ringtones available (50+)
- Unlimited range
- Easy to hear, discreet design



D1101UV

### IP VIDEO DOOR STATION D1101UV UPGRADE FOR D201/D202

#### Upgrades

- Larger camera angle: 180° hemispherical lens
- Higher image resolution: HDTV 1080p
- Latest sensor technology: 4D motion sensor with distance configuration
- More powerful speaker
- Classy and discreet design



A1081

### IP I/O DOOR CONTROLLER A1081

- Tamper-proof control of up to three doors or gates
- Encryption according to banking standards
- Monitoring of two external sensors
- Three freely configurable bi-stable switching relays (continuous or scheduled switching between open and closed)
- Switching relays keep their state even in the case of power loss
- WiFi, Ethernet, PoE
- Alarm message via push notification on smartphone and tablet
- Suitable for wall, ceiling and control cabinet mounting



A8003

### TABLE STAND A8003

For IP Video Indoor Station A1101, A1103 and A1104T with anti-slip pad for optimal surface adhesion




A1072

### 2-WIRE ETHERNET POE+ CONVERTER A1072

Transfers network data (Ethernet) and power supply (PoE+) over long distances via a simple two-wire cable.


- Use of existing cabling
- Only a two-wire cable required for both data transmission and power supply (PoE+)
- Support for PoE+ and PoE devices
- Compact design, robust housing
- Easy and fast installation

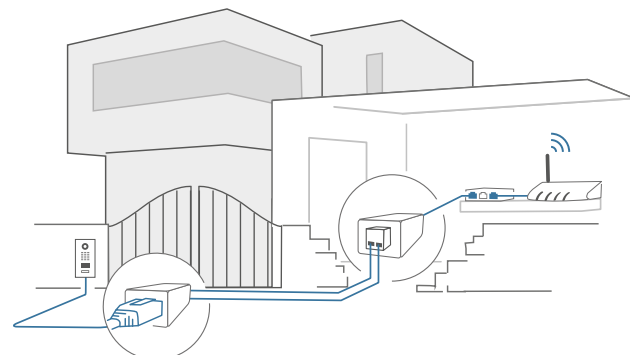

A1051

### INTERNET FIREWALL A1051

- Effective protection against network attackers from the outside and inside
- Easy installation and configuration
- Integrated status display
- Compatible with smart home systems
- Flexibly adaptable to individual network requirements (IP whitelist)

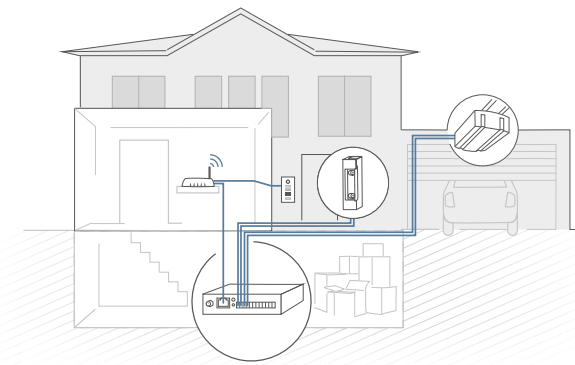

A8001

### WEDGE CORNER WALL-MOUNT ADAPTER A8001

For D1101V and D1102V  
Surface-mount, 7.5°  
mounted vertically up or  
down



A8002

### ANGLE CORNER WALL-MOUNT ADAPTER A8002


For D1101V and D1102V  
Surface-mount, 45°  
horizontal, mounted left  
or right



A8007

### BLUETOOTH KEYFOB REMOTE A8007

2.4 GHz Bluetooth Keyfob for D11x, D22x, D31x, A1121 and A1122 with integrated 13.56 MHz NFC-A tag



A8005

### DUAL- FREQUENCY RFID TRANSPONDER KEY FOB A8005

125 KHz (EM4100) and  
13.56 MHz (MIFARE®  
DESFire® EV3 8K), for  
D31x, D21x, D22x, A1121  
and A1122

## OUR REFERENCES AND INTEGRATIONS

DoorBird fits perfectly into any environment. With our “Made in Germany” products, we inspire customers all over the globe. More than 100,000 DoorBird IP Video Door Stations have already been installed worldwide.

Via our open interface “DoorBird Connect”, integration into third-party home and building automation systems is possible. Connect your DoorBird to your favorite components, such as traditional door openers, classic door chimes, smart locks, home servers, hubs, NAS and NVR. This gives you full control over your Smart Home and the Internet of Things (IoT), while benefiting from additional convenience and increased security.

### Compatible with:



and others



D2101V Titanium finish  
Netherlands  
Photo: Consepto Hekwerk



D1101V Graphite Black  
Germany



D2101KV Stainless steel  
Netherlands  
Photo: Consepto Hekwerk




D2201V Titanium Finish,  
Polished  
Slovenia  
Photo: i2C d.o.o.



D1101KH Stainless steel  
USA (California)  
Photo: ReelTime Sight & Sound



Custom solution  
Graphite Black  
Canada  
Photo: PM Wyre Ltd

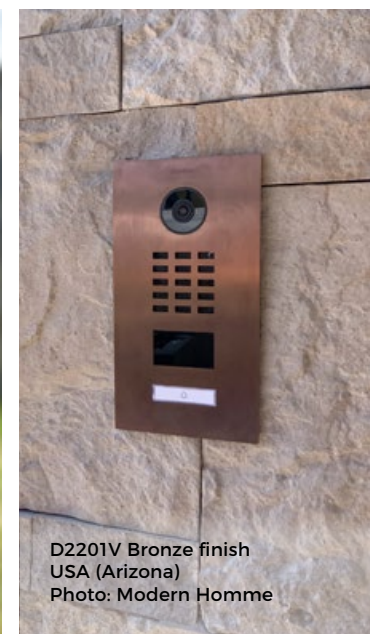

D2201V Bronze finish  
USA (Arizona)  
Photo: Modern Homme



D22DKV Bronze  
Germany



Custom solution  
Brass, polished  
United Kingdom



Custom solution  
Germany

## SUSTAINABILITY AT BIRD HOME AUTOMATION

DoorBird products are developed and manufactured in Germany by Bird Home Automation GmbH. In our Berlin factory, we manufacture all products with the utmost precision and care Made in Germany and deliver them to our customers all over the world.

As part of the ASSA ABLOY Group, we are a member of the Science Based Targets Initiative ([www.sciencebasedtargets.org](http://www.sciencebasedtargets.org)) to continue significantly reducing our greenhouse gas emissions throughout the value chain.

We believe that science-based targets will benefit our company on multiple levels. By setting a net-zero target in line with a 1.5 °C future, we are making a decisive contribution to limiting the devastating effects of climate change.

We will halve Scope 1 and Scope 2 emissions in our own operations by 2030.

More than 130 employees work every day in our company to continuously develop, produce and distribute our products in a more environmentally friendly way. Our focus is on the highest quality and durability of our products combined with the best service to guarantee customer satisfaction. For us, Made in Germany is not just a label, but a philosophy we live by. Sustainability is the central task of our modern society. We take responsibility for a sustainable future and combine ecology, economy and social responsibility. Through our outstanding products, we are a strong partner for our customers in sustainable building modernization. This is reflected in various areas:


### RESEARCH AND DEVELOPMENT

We design the development of our innovative products to be as sustainable as possible. From the outset, our employees in the Research and Development departments make sure to develop products that conserve resources, are reliable and durable. The high quality of the products and their long product life cycle prevent costly repairs, reduce material consumption and avoid returns.



### PRODUCTION

In production, the focus is on the procurement and use of environmentally friendly materials and the exclusion of hazardous substances. We pay particular attention to using as little packaging material as possible and ensuring that it is also biodegradable. Together with many of our suppliers, we have developed a reusable packaging system based on the returnable packaging principle in order to transport and store components in the most resource-efficient way possible. We always keep the entire production process in view; for example, we determine and compare our electricity consumption, material scrap and many other factors on a monthly basis in order to identify and eliminate unplanned excess consumption.

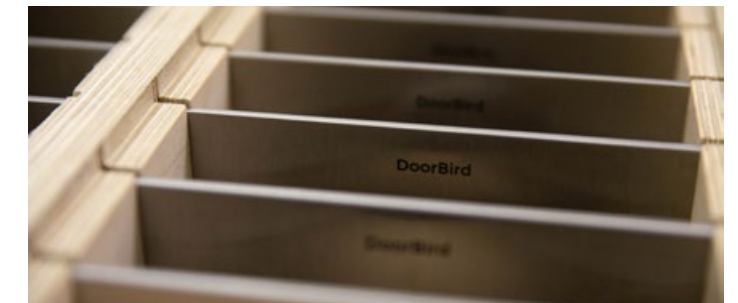

We do more than just spot checks: every single product that leaves our production is extensively checked for both function and visual defects. This helps us avoid unnecessary returns and resource consumption. We are continuously working to make our supply chains transparent and to design them in both ecological and social terms.

### SERVERS

As an industrial company, we have achieved something incredible: all of our servers in Europe run exclusively on 100% green electricity. In doing so, the company demonstrates its ecological responsibility without neglecting economic challenges and supports the public expansion of renewable energies.

### STAFF

Our employees are committed to environmental protection through our Environmental, Social and Governance (ESG) policy from the moment they join our organization. We also regularly provide information on various environmental protection topics and highlight actionable options for implementing them both in everyday work and in private life.

For more information about sustainability, visit [www.doorbird.com](http://www.doorbird.com) and [www.assaabloy.com](http://www.assaabloy.com)

DoorBird is a product of the Bird Home Automation Group.

**Headquarters in Germany**  
Bird Home Automation GmbH  
Uhlandstraße 165  
10719 Berlin

